


#### Features

- Low-loss RF filter for mobile systems
- Low amplitude ripple
- No matching network required for operation at  $50\Omega$
- Ceramic package for Surface Mounted Technology (SMT)
- Lead-free production and RoHS compliant

## **Package Dimensions**

#### Ceramic Package: DCC6C



# **Pin Configuration**

2	Input
5	Output
1, 3, 4, 6	Ground

Κ

Х

L

Y

# Marking

NDF • 9339	NDF * "ND": • 9339 "9339": 1 "*":					Top View, Laser Marki Manufacturer's mark Part number Lot number (The code shown				SAW filter Terminal 1 ries in a 4-year cycle		ycle)
Code	1	2	3	4	5	6	7	8	9	10	11	12
2011	а	b	С	d	е	f	g	h	i	j	k	m
2012	n	р	q	r	s	t	u	v	w	х	у	z

F

т

G

U

Н

V

J

W

# **Maximum Ratings**

2013

2014

Α

Ν

В

Ρ

С

Q

D

R

Е

s

Rating	Value	Unit	
Input Power Level	Р	15dBm	dBm
DC Voltage	V <sub>DC</sub>	9	V
Operating Temperature Range	TA	-40 ~ +85	°C
Storage Temperature Range	$T_{ m stg}$	-40 ~ +85	°C
ESD-HBM for all pin	E <sub>SD</sub>	150	V

Μ

Ζ




#### **Electrical Characteristics**

Item		Minimum	Typical	Maximum	Unit
Center Frequency	f <sub>C</sub>		1817.5		MHz
Insertion Loss	IL				
1805 MHz1830 MHz			3.0	3.5	Db
Source Impedance(single ended) <sup>(1)</sup>			50		Ω
Load Impedance(single ended) <sup>(1)</sup>			50		Ω
Absolute Attenuation	α				
DC 1710 MHz		20	25		dB
1710 1735 MHz		25	30		dB
1735 1770 MHz		20	25		dB
1850 1920 MHz		10	15		dB
1920 2000 MHz		25	30		dB
2000 3500 MHz		25	30		dB
Amplitude Ripple (p-p) in 1805 MHz1830 MHz			0.8	1.2	dB
VSWR in 1805 MHz1830 MHz			2.0	2.5	
Input / Output Impedance (Nominal)			50	•	Ω
	A		• •	- ·	

🕲 RoHS Compliant 🕕 Electrostatic Sensitive Device


# **Typical Frequency Response**

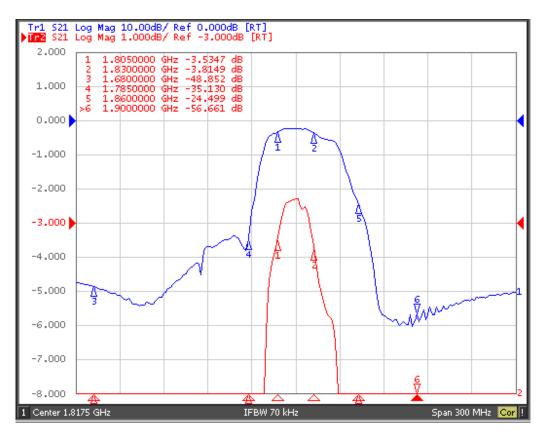







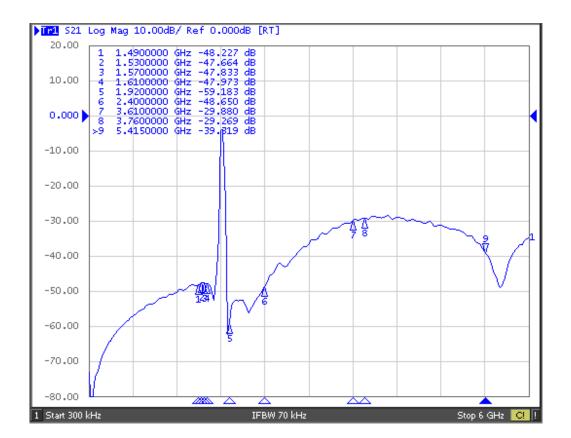

### **Stability Characteristics**

	Test item	Condition of test					
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m					
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz(b) Amplitude: 1.5 mm(c) Directions: X,Y and Z(d) Duration: 2 hours					
3	Moisture resistance	(a) Condition: $40^{\circ}C \pm 2^{\circ}C$ , $93^{+2}_{-3}^{+2}$ % RH. (b) Duration: 96 hours (c) Wait 4 hours before measurement					
4	Climatic sequence	(a) $+70^{\circ}$ C for 16 hours(b) $+55^{\circ}$ C for 24 hours, 90~95% R.H.(c) $-25^{\circ}$ C for 2 hours(d) $+40^{\circ}$ C for 24 hours, 90~95% R.H.(e) Wait 4 hours before measurement					
5	High temperature exposure	(a) Temperature: 85°C (b) Duration: 250 hours (c) Wait 4 hours before measurement					
6	Temperature cycling	(a) +85°C for 30 minutes $\Rightarrow$ -40°C for 30 minutes repeated 120 times (b) Wait 4 hours before measurement					




Requirements: The SAW filer shall remain within the electrical specifications after tests.


#### Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

# **Test Circuit**

# **Recommended Land Pattern**

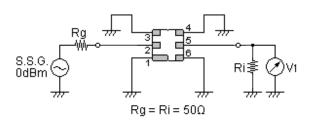







# **Packing Information**

# Carrier Tape

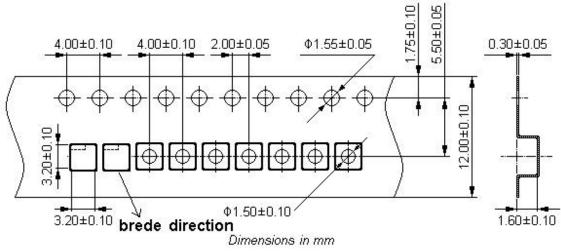



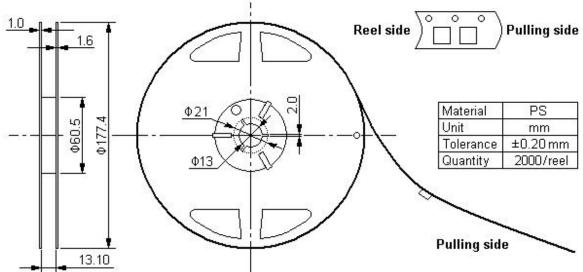

# Outer Packing


Туре	Quantity	Dimension	Description	Weight
Carton Box I	10000	190×190×95	anti-static plastic bag & carton box 1 reel / bag	0.85
Carton Box II	20000	190×190×190	5 bags / box (10000 pcs) 10 bags / box (20000 pcs)	1.80
	•	Linit: mm		L Init: ka

Unit: mm

Unit: kg



#### **Recommended Soldering Profile**

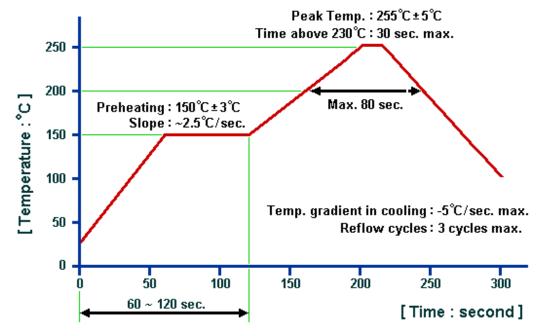

### © NEDI 2012. All Rights Reserved.

- 1. The specifications of this device are subject to change or obsolescence without notice.
- 2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- 3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- 4. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com

WINNSKY INTERNATIONAL (H.K.) LIMITED